

DRILLING ACCELERATES AT TMT WITH SECOND RIG COMMENCING IN EARLY MARCH

KEY HIGHLIGHTS

- Drill program accelerated and expanded with a second diamond rig being mobilised to maximise the current field season.
- Existing deep-capacity diamond rig now drilling at Toro South, targeting a shallow epithermal system overlying a large-scale copper porphyry target.
- Second diamond rig to commence in early March to fast-track follow-up drilling at Toro Central.
- Three drill holes completed at Toro Central testing epithermal target, assays pending.
- MT/IP survey completed at Tambo South, with advanced 3D modelling underway to refine copper porphyry follow-up drill targets.

Belararox Limited (ASX: BRX) (“Belararox” or “the Company”) is pleased to provide the following update on exploration drilling and other exploration work currently ongoing at the Company’s TMT Project in Argentina (“TMT”)

Drilling of shallow epithermal targets is progressing well at the TMT Project, with the first three holes now completed at Toro Central. The deep-capacity drill rig (Boart Longyear LF230, drill capacity up to 2000m) has now moved to Toro South to test a shallow epithermal target overlaying a potential deeper copper porphyry target. The Company has decided to mobilise a second diamond drill rig to the project to continue testing the epithermal target at Toro Central and maximise the current field season.

Executive Director Chris Gale commented: “*The mobilisation of a second drill rig reflects our confidence in the scale and potential of the TMT Project. With both shallow epithermal and deeper porphyry targets being tested simultaneously at Toro Central and Toro South, we are entering an important phase of value-driven exploration*”.

Exploration Manager Chris Blaser commented: “*Geological, geochemical and geophysical datasets are converging at Toro South, where a shallow epithermal target overlies a deeper Cu porphyry target. The addition of a second rig allows us to test both targets efficiently during the current field season*”.

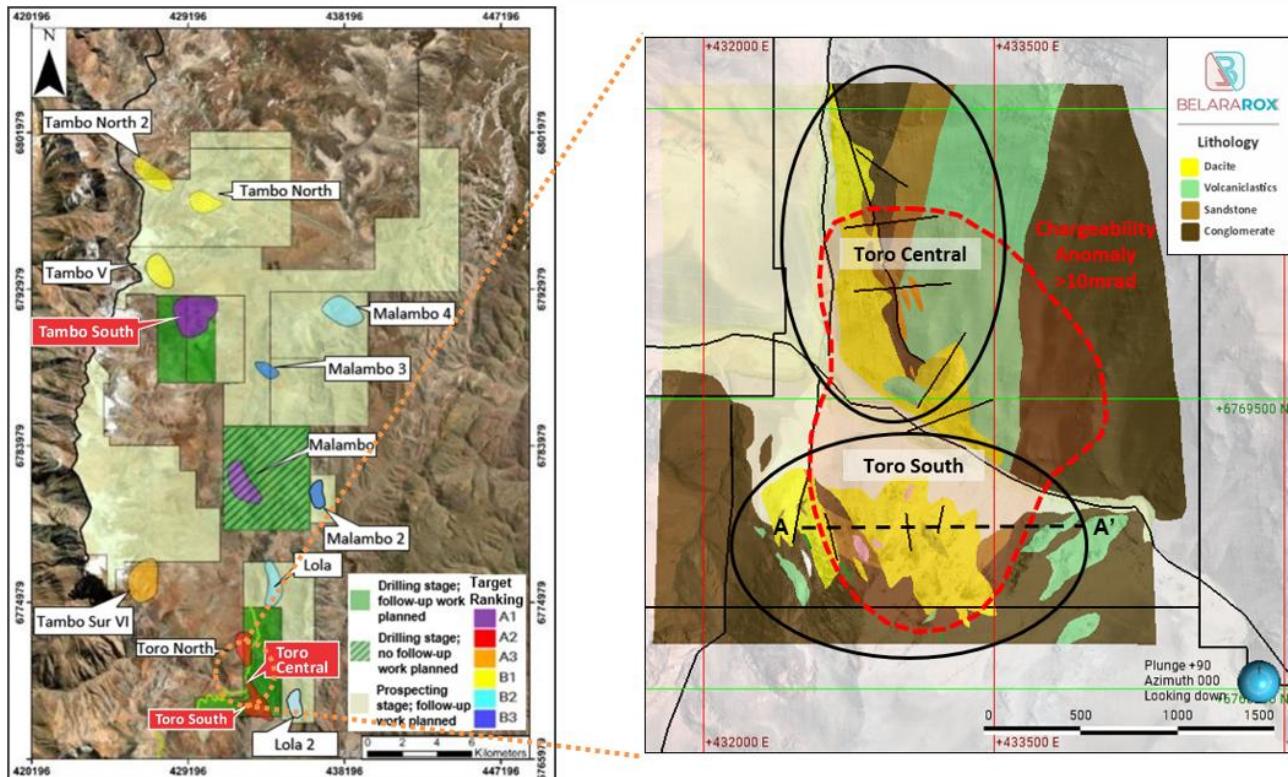


Figure 1: Left image shows an overview of Belarox's TMT project, and right image shows a plan view of simplified geology of Toro Central and Toro South, and the chargeability anomaly outline $>10\text{mrad}$ (UBC 3D IP Inversion Model), extending over 2000m from north to south¹. IP inversion models are used as an exploration targeting tool only. Cross section A-A' is shown in Figure 3.

Toro Central

The second and third drill holes have been completed successfully (TMT-TC-DDH-002 to 415.00 meters and TMT-TC-DDH-003 to 283.70 meters). Drilling at Toro Central is focused on a shallow high-grade silver, copper and gold epithermal target, identified in historical drilling (Votorantim 2014) and from surface sampling, where assays have returned up to 1980 ppm Ag (63.7 oz/t Ag), 2.56 ppm Au, 1.50% Cu (Table 1)^{2,3}.

Surface sampling is selective in nature and may not be representative of the overall mineralised system.

Historical drill results at Toro Central include (Votorantim 2014 drill campaign)²:

ARRLSDD0001:

- **44m @ 55.7ppm Ag, 0.22% Cu, 0.1ppm Au, 0.71% Zn and 0.04% Pb from 286m**

ARRLSDD0003:

- **22m @ 41.2ppm Ag, 0.31ppm Au, 0.24% Cu & 1.25% Zn, 0.27% Pb from 10m including:**
- **6m @ 135.9ppm Ag, 1.00ppm Au, 0.80% Cu & 1.72% Zn, 0.78% Pb from 10m**

ARRLSDD0002:

- **10m @ 42.7ppm Ag, 0.20ppm Au, 0.10% Cu & 0.50% Zn, 0.31% Pb from 8m including:**
- **2m @ 140.0ppm Ag, 0.60ppm Au, 0.40% Cu & 0.10% Zn, 0.84% Pb from 8m**

The mineralisation is characterised by Ag-Au-Cu-Pb-Zn-bearing (intermediate-sulfidation) mineralisation and appears to be structurally controlled (Figure 2).

¹Refer to BRX announcement dated 29/01/2026 – First drill hole completed at Toro Central

²Refer to BRX announcement dated 17/07/2023 - TMT project in Argentina Significant Zinc Mineralisation (266m @ m 0.76% Zn) verified and reported under the JORC (2012) Code

³Refer to BRX's ASX release dated 21/02/2024 - TMT Project - Toro Surface Assay Results and Geology Strengthen the Interpretation of a Porphyry Mineralisation / Epithermal Mineralisation


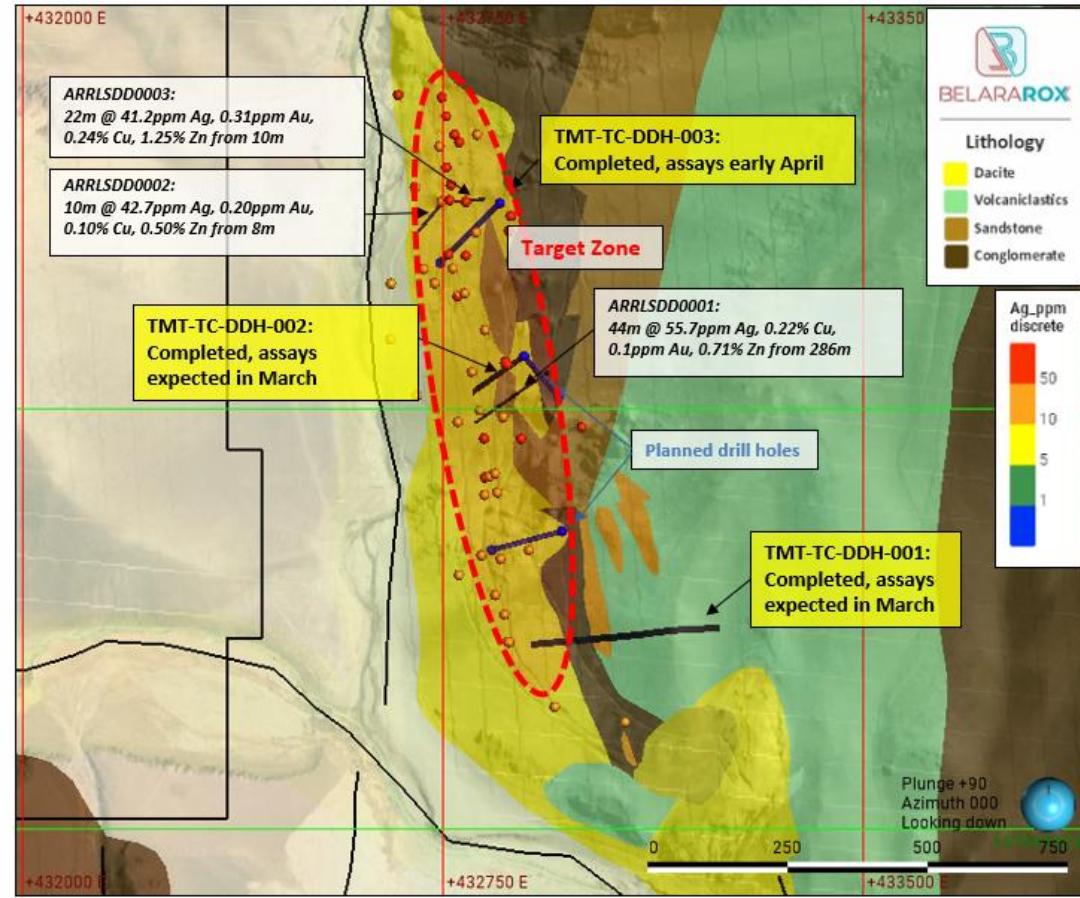


Table 1: Previously reported surface assay results at Toro Central. Only values >50ppm Ag are listed here for the full result table refer to BRX's ASX release dated 21/02/2024 and ASX release dated 21/02/2024. Surface sampling is selective in nature and may not be representative of the overall mineralised system.

Sample ID	Type of Sample	Coordinate System	Easting (m)	Northing (m)	Altitude (m)	Ag (ppm)	Au (ppm)	Cu (pct)
VMARRO000114	Punctual	WGS84 UTM Zone 19S	432791	6770618	3358	1980.00	0.59	1.50
VMARRO000109	Chip	WGS84 UTM Zone 19S	432779	6770725	3345	1920.00	1.42	0.97
VMARRO000137	Chip	WGS84 UTM Zone 19S	432770	6770739	3340	1260.00	0.34	0.58
VMARRO000161	Chip	WGS84 UTM Zone 19S	432747	6770805	3329	1240.00	0.34	0.30
VMARRO000111	Punctual	WGS84 UTM Zone 19S	432764	6770648	3339	1170.00	0.34	1.50
VMARRO000184	Chip	WGS84 UTM Zone 19S	432860	6770330	3393	1060.00	2.56	0.16
TMTA00102	Chip	WGS84 UTM Zone 19S	432861	6770333	3393	597.00	1.08	0.36
TMTB00756	Chip	WGS84 UTM Zone 19S	432997	6770217	3490	484.00	0.15	0.05
TMTB00758	Chip	WGS84 UTM Zone 19S	432864	6770329	3395	369.00	2.49	0.16
VMARRO000112	Punctual	WGS84 UTM Zone 19S	432762	6770621	3340	324.00	0.29	0.61
VMARRO000110	Punctual	WGS84 UTM Zone 19S	432756	6770680	3331	303.00	0.30	0.57
VMARRO000136	Chip	WGS84 UTM Zone 19S	432889	6770196	3404	200.00	0.59	0.03
TMTA00089	Chip	WGS84 UTM Zone 19S	432776	6770450	3347	140.00	0.83	0.58
VMARRO000183	Chip	WGS84 UTM Zone 19S	432870	6770593	3408	131.00	0.10	0.27
VMARRO000120	Chip	WGS84 UTM Zone 19S	432823	6770197	3360	113.00	0.09	0.07
TMTA00095	Chip	WGS84 UTM Zone 19S	432824	6770127	3361	99.90	0.93	0.53
TMTB00160	Chip	WGS84 UTM Zone 19S	432868	6770566	3403	90.30	0.40	0.04
VMARRO000160	Chip	WGS84 UTM Zone 19S	432755	6770771	3333	87.10	0.08	0.12
VMARRO000158	Chip	WGS84 UTM Zone 19S	432760	6770525	3340	70.50	0.38	0.41
VMARRO000173	Chip	WGS84 UTM Zone 19S	432790	6770523	3357	60.10	0.15	0.23
TMTB00187	Chip	WGS84 UTM Zone 19S	432670	6770809	3279	50.50	0.21	0.01



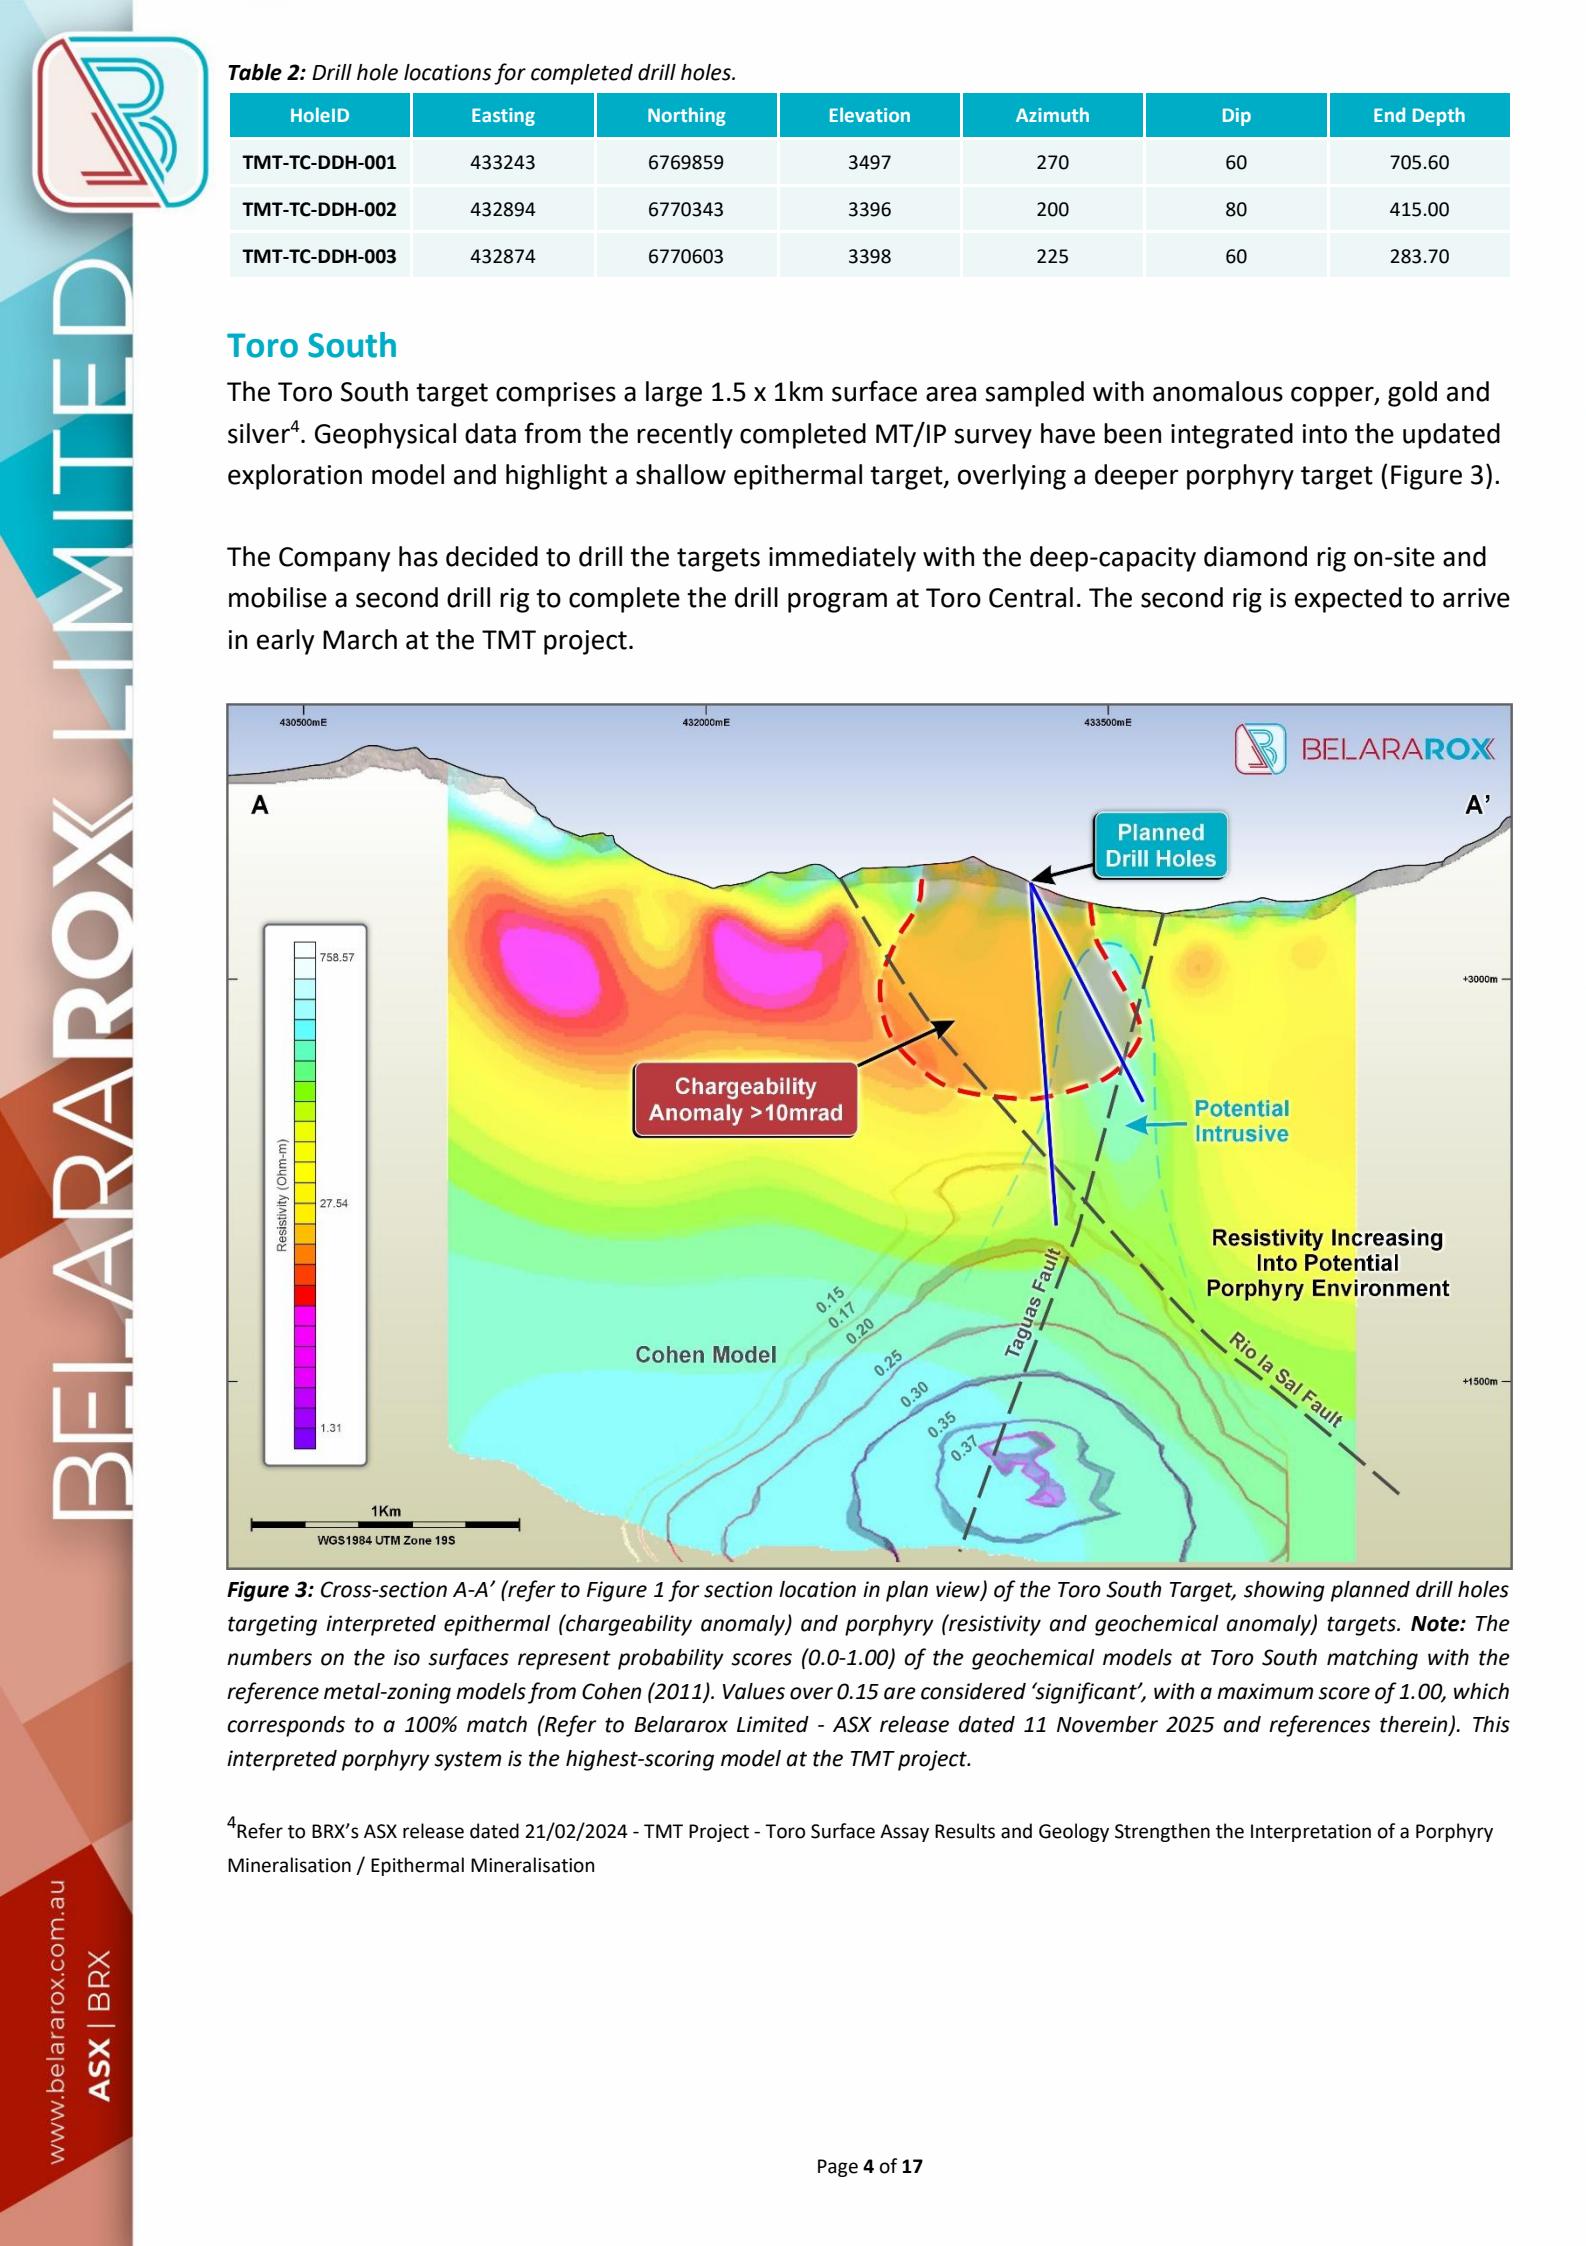

Tambo South

The combined MT/IP survey at Tambo South has been completed. Advanced 3D interpretation is ongoing integrating geophysical data with the geochemical model to refine drill targets for December 2026.

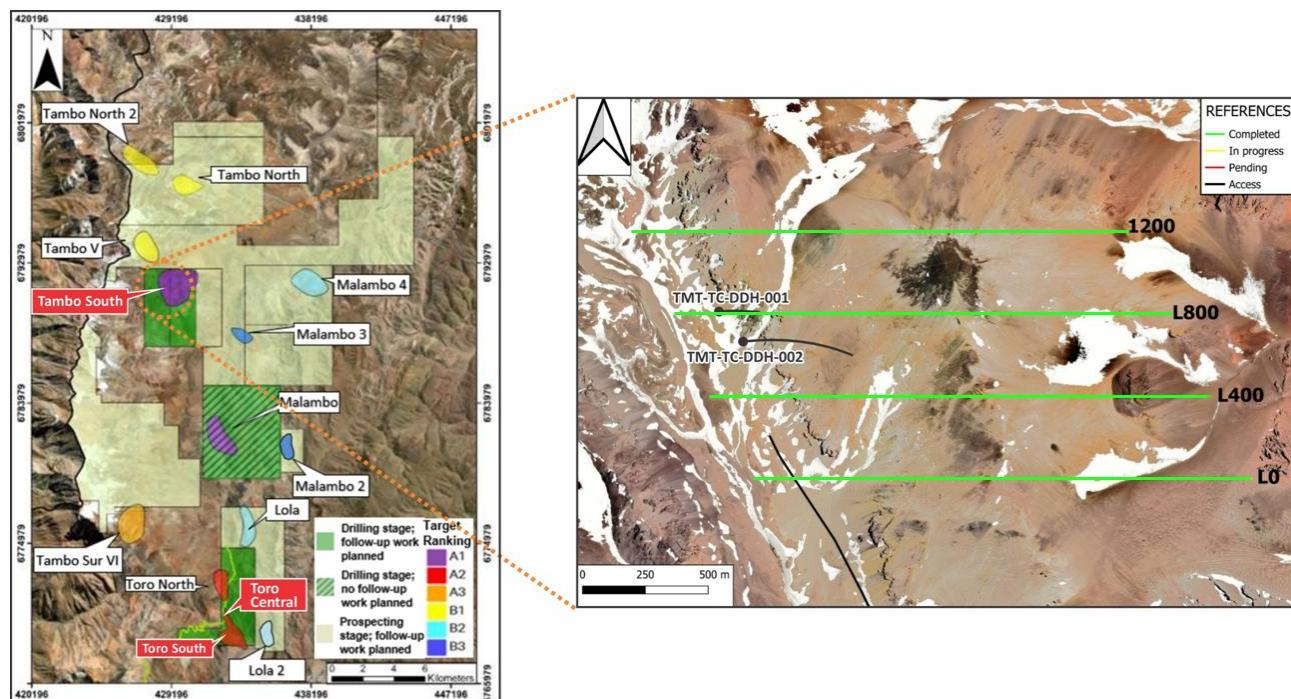


Figure 4. Left image is overview map of the TMT project and targets from ASTER and SENTINEL 2 interpretation, (for more information see BRX ASX Release 18 May 2023). Right image shows lines of the MT/IP survey at Tambo South and drill holes TMT-TSU-DDH-001 and TMT-TSU-DDH-002 from 2025 field season drilling⁵.

TMT - Further Work

- 3D geophysical data interpretation and modelling are ongoing Tambo South, allowing further refinement of copper porphyry targets.
- First assays expected early March 2026 from Toro Central drilling.

Further updates will be provided as material results become available.

⁵Refer to BRX's ASX release dated 04/06/2025 – Copper mineralisation confirmed at Tambo South



SHAREHOLDER ENQUIRIES

Chris Gale
Executive Director
Belararox Limited
chris.gale@belararox.com.au

MEDIA ENQUIRIES

Paul Berson
Corporate Storytime
paul@corporatestorytime.com

GENERAL ENQUIRIES

Belararox Limited
www.belararox.com.au
info@belararox.com.au

COMPETENT PERSON STATEMENT (TMT PROJECT ARGENTINA)

The information in this announcement to which this statement is attached relates to Exploration Results and is based on information compiled by Mr Chris Blaser. Mr Blaser is the Exploration Manager of Belararox Ltd and is a Competent Person who is a Member of the Australasian Institute of Mining and Metallurgy (AusIMM) and a Member of the Australian Institute of Geoscientists (AIG). Mr Blaser has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration, and to the exploration techniques being used to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr Blaser has consented to the inclusion in this announcement of the matters based on his information, in the form and context in which they appear.

The Company confirms that it is not aware of any new information or data that materially affects the information included in prior market announcements and, in the case of exploration results, that all material assumptions and technical parameters underpinning the results in the relevant market announcement continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcement.

ABOUT BELARAROX LIMITED (ASX: BRX)

Belararox is a mineral explorer focused on securing and developing resources to meet the surge in demand from the technology, battery, and renewable energy markets. Our projects currently include the potential for copper, gold, silver and zinc resources.

The Company's portfolio includes the TMT Project in Argentina, targeting copper, gold and other metals, a recent acquisition in Botswana's Kalahari Copper Belt, the Belara project in New South Wales, focused on zinc and copper, and the Bullabulling project (under Option to Minerals 260) in Western Australia, targeting gold.

TMT PROJECT

Situated within Argentina's San Juan Province, the Toro-Malambo-Tambo (**TMT**) project occupies an unexplored area between the prolifically mineralised El Indio and Maricunga Metallogenic Belts.

Belararox has already successfully identified numerous promising targets within the TMT project. These targets will undergo thorough exploration as part of an extensive program led by an experienced Belararox team currently established in Argentina.





APPENDIX A: JORC (2012) CODE TABLE 1

Criteria	JORC Code Explanation	Commentary
<i>Sampling techniques</i>	<ul style="list-style-type: none"> Nature and quality of sampling (e.g., cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as downhole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representativity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done; this would be relatively simple (e.g., 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold with inherent sampling problems. Unusual commodities or mineralisation types (e.g., submarine nodules) may warrant the disclosure of detailed information. 	<ul style="list-style-type: none"> Visual observations of core and hand specimens are qualitative only and are not indicative of assay results or economic mineralisation. Diamond drilling was undertaken to obtain core samples. Samples used for geochronological analysis are detailed in Table 1 within the body of the announcement.
<i>Drilling techniques</i>	<ul style="list-style-type: none"> Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g., core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other types, whether the core is oriented and if so, by what method, etc.). 	<ul style="list-style-type: none"> PQ, HQ and NQ diamond drill core. Triple-tube wire line standard equipment. Surveys used DeviShot tool initially, then converted to Gyro (TruGyro) tool. Core is oriented using spear technique.
<i>Drill sample recovery</i>	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures are taken to maximise sample recovery and ensure the representative nature of the samples. Whether a relationship exists between sample recovery and grade, and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> For diamond drilling, recovery is recorded for every run. In general, core recovery is in excess of 99%. There is insufficient core loss to assess or consider a bias.
<i>Logging</i>	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography. The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> At selected and systematic locations during the Anaconda geological mapping, descriptions of lithology, alteration, mineralisation and other features were systematically recorded in the field and encoded into an Excel sheet for future reference. Samples are being collected in a systematic and selective fashion with descriptions of lithology, alteration, mineralisation and other features systematically recorded in the field and encoded into an Excel sheet for



Sub-sampling techniques and sample preparation

- If core, whether cut or sawn and whether quarter, half or all core taken.
- If non-core, whether riffled, tube sampled, rotary split, etc., and whether sampled wet or dry.
- For all sample types, the nature, quality and appropriateness of the sample preparation technique.
- Quality control procedures adopted for all sub-sampling stages to maximise the representativity of samples.
- Measures are taken to ensure that the sampling is representative of the in-situ material collected, including, for instance, results for field duplicate/second-half sampling.
- Whether sample sizes are appropriate to the grain size of the sampled material.

Quality of assay data and

- The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or

future reference.

- Visual estimates of mineral abundance based on the observations of the Company geologists should never be considered a proxy or substitute for laboratory concentrations where grades are the factor of principal economic interest. Visual estimates also potentially provide no information regarding impurities or deleterious physical properties relevant to valuations. All visual estimates have been made by experienced Geologists using standardised abundance charts.
- At the rig, the core is photographed, initial geotechnical logging is performed, and the core is oriented.
- Core is photographed, logged, cut and sampled by project personnel at a core logging area at the camp.
- Geological and geotechnical logging is at a level of detail to support future Mineral Resource Estimation and other mining and metallurgical studies.
- Core is sampled continuously down the hole.
- Sample lengths are 4 metres in zones of little geological interest and 2 metres in zones of higher geological interest.
- Where visual estimates of mineralisation exceed 20m at > 0.1 volume-% Cu (or CuEq), trigger the collection of samples every 2m.
- 2m samples consist of half-core.
- 4m samples consist of quarter core.
- In cutting and sampling of half-core and quarter-core, the 0° orientation line is used to cut the core to avoid selective sample bias.
- Sample material for age-dating analysis comprised 4 samples from intrusive rocks (refer to ASX announcement on 11 November 2025).
- Geochronological analysis was performed by Curtin University in Perth for the two samples at Toro and the CODES Analytical Laboratories in Tasmania for the two samples from Tambo South.
- The analysis was completed using LA-ICPMS (laser ablation inductively coupled plasma mass spectrometry) on zircon grains from the intrusive rocks
- Ages were determined from the relative decay of uranium to lead in zircon
- Curtin and CODES utilised industry QAQC when conducting age-dating analysis, including the use of standards, all of which returned within acceptable threshold values.
- In each sample, a coherent population of young zircons was identified and are interpreted to be the magmatic age of the samples
- A weighted mean age and weighted uncertainty were then calculated for each sample using the remaining analyses.
- ALS Patagonia has been selected to undertake analyses using the following:



<p><i>laboratory tests</i></p>	<ul style="list-style-type: none"> total. For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis include instrument make and model, reading times, calibration factors applied and their derivation, etc. Nature of quality control procedures adopted (e.g., standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	<p><i>Verification of sampling and assaying</i></p>	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, and data storage (physical and electronic) protocols. Discuss any adjustments to assay data.
<p><i>Location of data points</i></p>	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in MineralResource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 		<ul style="list-style-type: none"> GPS locations for the Anaconda geological mapping activities are being captured by handheld GPS units in the field and later encoded into an Excel spreadsheet containing the surface samples with descriptions of lithology, alteration, mineralisation and other features. GPS sample locations are being captured by handheld GPS units in the field and later encoded into an Excel spreadsheet containing the surface samples with descriptions of lithology, alteration, mineralisation and other features. GPS co-ordinates were recorded in Eastings and Northings for WGS84 Zone 19S The spectral data discussed in previous ASX releases includes two (2) different multispectral spaceborne datasets for the location of the twelve (12) targets: <ul style="list-style-type: none"> [i] Advanced Spaceborne Thermal Emission and Reflection Radiometer (“ASTER”); and [ii] Sentinel-2. The data is initially recorded by satellites, and the processing and interpretation were delivered in the coordinate system of WGS84 Zone 19S. The survey control is appropriate for the interpretation of the processed ASTER and Sentinel-2 to deliver regional targets as surface expressions that are likely to represent surface expressions of high-sulphidation epithermal and/or porphyry-style mineral systems. Follow-up on the ground exploration activities, comprised of surface sampling and Anaconda mapping have used hand-held GPS to assist with the physical location of the collected samples. Drillholes are located with a handheld GPS, and the alignment of the rig setup uses a handheld compass. Topographic control is via the GPS and the satellite 5m DEM.



<p><i>Data spacing and distribution</i></p>	<ul style="list-style-type: none"> • Data spacing for reporting of Exploration Results. • Whether the data spacing and distribution are sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. • Whether sample compositing has been applied. 	<ul style="list-style-type: none"> • The surface sample locations that are in the process of being collected vary from clusters at outcrops to surface samples aiming to cover a broad area, at a spacing ~200m apart to cover and identify high-sulphidation epithermal and/or porphyry mineral systems. • The data discussed in the ASX releases deals with two (2) different multispectral spaceborne datasets: <ul style="list-style-type: none"> ○ [i] Advanced Spaceborne Thermal Emission and Reflection Radiometer (“ASTER”); and ○ [ii] Sentinel-2. • The data is initially recorded by satellites, and the processing and interpretation were delivered in the coordinate system of WGS84 Zone 19S. • Multispectral image sensors simultaneously capture image data within multiple wavelength ranges (bands) across the electromagnetic spectrum. Each band is commonly described by the band number and the band wavelength centre position. • The ASTER processed datasets of a resolution of 15m for Visible Near Infrared (“VNIR”) or 30m for Short Wavelength Infrared (“SWIR”). • The Sentinel-2 resolution ranges from 10m to 60m dependent on bandwidth. • The survey control and data resolution are appropriate for the interpretation of the processed ASTER and Sentinel-2 to deliver regional targets as surface expressions that are likely to represent surface expressions of high-sulfidation epithermal and/or porphyry-style mineral systems. • Follow-up on the ground exploration activities, comprised of surface sampling and Anaconda mapping have used handheld GPS to assist with the physical location of the collected samples. Surface samples collected included Outcrop/Rock Chip, Talus, and Float Samples.
<p><i>Orientation of data in relation to geological structure</i></p>	<ul style="list-style-type: none"> • Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. • If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> • The surface sample locations that are in the process of being collected vary from clusters at outcrops to surface samples aiming to cover a broad area, at a spacing of ~200m apart, to cover and identify high-sulphidation epithermal and/or porphyry mineral systems. • Hyperspectral data discussed in the previous ASX releases deals with two (2) different multispectral spaceborne datasets: <ul style="list-style-type: none"> ○ [i] Advanced Spaceborne Thermal Emission and Reflection Radiometer (“ASTER”); and ○ [ii] Sentinel-2. • Multispectral image sensors simultaneously capture image data within multiple wavelength ranges (bands) across the electromagnetic spectrum. Each band is commonly described by the band number and the band wavelength centre position.



		<ul style="list-style-type: none">• The interpretation of the regional geological structures, based on a number of sources and datasets (e.g. porphyry potential [Ford, et al, (2015) & USGS (2008)], crustal lineaments [Chernicoff, et al., (2002)], regional gravity, regional magnetics, regional and local geology [SegemAR (2023) & Servicio Nacional de Geología y Minera (2023)] had been utilised to confirm if the interpretation of alteration and/or mineralisation from the processed ASTER and Sentinel-2 datasets.• Geological interpretation is then based on the responses displayed in the imagery against known surface hydrothermal alteration and/or surface geology associated with key mineral deposits. Geological analogues are a useful tool for delineating similar surface expressions of mineralisation.• Follow-up on the ground exploration activities, comprised of surface sampling and Anaconda mapping, using handheld GPS to assist with the physical location of the collected samples. Surface samples collected included Outcrop/Rock Chip, Talus, and Float Samples. These samples are selective for outcrop or spatially distributed across the ground surface for Talus and Float samples to generate a first-pass geochemical understanding of the exposed geology.
<i>Sample security</i>	<ul style="list-style-type: none">• The measures taken to ensure sample security.	<ul style="list-style-type: none">• Samples are bagged, numbered, zip-tied and transported with dispatch information by project staff directly to the office/warehouse in San Juan. Routinely (fortnightly), samples are then transported to the Mendoza ALS preparation lab.
<i>Audits or reviews</i>	<ul style="list-style-type: none">• The results of any audits or reviews of sampling techniques and data.	<ul style="list-style-type: none">• Sampling techniques have been developed in consultation with the Competent Person.• No audits or reviews have been undertaken to date.



SECTION 2 REPORTING OF EXPLORATION RESULTS

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary																																																																																				
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership, including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national parks and environmental settings. The security of the tenure held at the time of reporting and any known impediments to obtaining a license to operate in the area. 	<ul style="list-style-type: none"> The mineral tenures are located in the province of San Juan, Argentina and details of the Terms Sheet for the Acquisition of the Fomo Ventures No1 Pty Ltd Argentinean mineral tenures are presented in Belarrox Limited (ASX: BRX) ASX Release "Belarrox secures rights to acquire Project in Argentina" dated 03-Jan-2023 https://cdn-api.markitdigital.com/apiman-gateway/ASX/asx-research/1.0/file/2924-02618068-6A1130657?access_token=83ff96335c2d45a094df02a206a39ff4 The details of the minerals tenures that make up the TMT Project are as follows: 																																																																																				
<table border="1"> <thead> <tr> <th data-bbox="428 560 691 587">Tenure Name</th><th data-bbox="691 560 954 587">Tenement</th><th data-bbox="954 560 1217 587">Tenure Type</th><th data-bbox="1217 560 1480 587">Area (Ha)</th><th data-bbox="1480 560 1742 587">Grant Date</th><th data-bbox="1742 560 2160 587">Expiry Date</th></tr> </thead> <tbody> <tr> <td data-bbox="428 587 691 619">LOLA</td><td data-bbox="691 587 954 619">1124-181-M-2016</td><td data-bbox="954 587 1217 619">Discovery claim</td><td data-bbox="1217 587 1480 619">2,367.0</td><td data-bbox="1480 587 1742 619">29 Dec 2016</td><td data-bbox="1742 587 2160 619">Not Applicable</td></tr> <tr> <td data-bbox="428 619 691 651">MALAMBO</td><td data-bbox="691 619 954 651">425-101-2001</td><td data-bbox="954 619 1217 651">Discovery claim</td><td data-bbox="1217 619 1480 651">3,004.0</td><td data-bbox="1480 619 1742 651">13 Aug 2019</td><td data-bbox="1742 619 2160 651">Not Applicable</td></tr> <tr> <td data-bbox="428 651 691 682">MALAMBO 2</td><td data-bbox="691 651 954 682">1124-485-M-2019</td><td data-bbox="954 651 1217 682">Discovery claim</td><td data-bbox="1217 651 1480 682">414.1</td><td data-bbox="1480 651 1742 682">24 Jun 2021</td><td data-bbox="1742 651 2160 682">Not Applicable</td></tr> <tr> <td data-bbox="428 682 691 714">MALAMBO 3</td><td data-bbox="691 682 954 714">1124-074-2022</td><td data-bbox="954 682 1217 714">Discovery claim</td><td data-bbox="1217 682 1480 714">2,208.0</td><td data-bbox="1480 682 1742 714">Not Granted</td><td data-bbox="1742 682 2160 714">Not Applicable</td></tr> <tr> <td data-bbox="428 714 691 746">MALAMBO 4</td><td data-bbox="691 714 954 746">1124-073-2022</td><td data-bbox="954 714 1217 746">Discovery claim</td><td data-bbox="1217 714 1480 746">2,105.0</td><td data-bbox="1480 714 1742 746">27 Nov 2023</td><td data-bbox="1742 714 2160 746">Not Applicable</td></tr> <tr> <td data-bbox="428 746 691 778">TAMBO SUR</td><td data-bbox="691 746 954 778">1124-188-R-2007</td><td data-bbox="954 746 1217 778">Discovery claim</td><td data-bbox="1217 746 1480 778">4,451.0</td><td data-bbox="1480 746 1742 778">11 Jul 2019</td><td data-bbox="1742 746 2160 778">Not Applicable</td></tr> <tr> <td data-bbox="428 778 691 809">TAMBO SUR I</td><td data-bbox="691 778 954 809">1124-421-2020</td><td data-bbox="954 778 1217 809">Discovery claim</td><td data-bbox="1217 778 1480 809">833.0</td><td data-bbox="1480 778 1742 809">9 Nov 2021</td><td data-bbox="1742 778 2160 809">Not Applicable</td></tr> <tr> <td data-bbox="428 809 691 841">TAMBO SUR II</td><td data-bbox="691 809 954 841">1124-420-2020</td><td data-bbox="954 809 1217 841">Discovery claim</td><td data-bbox="1217 809 1480 841">833.0</td><td data-bbox="1480 809 1742 841">13 Dec 2021</td><td data-bbox="1742 809 2160 841">Not Applicable</td></tr> <tr> <td data-bbox="428 841 691 873">TAMBO SUR III</td><td data-bbox="691 841 954 873">1124-422-2020</td><td data-bbox="954 841 1217 873">Discovery claim</td><td data-bbox="1217 841 1480 873">833.0</td><td data-bbox="1480 841 1742 873">13 Jul 2022</td><td data-bbox="1742 841 2160 873">Not Applicable</td></tr> <tr> <td data-bbox="428 873 691 905">TAMBO SUR IV</td><td data-bbox="691 873 954 905">1124-299-2021</td><td data-bbox="954 873 1217 905">Discovery claim</td><td data-bbox="1217 873 1480 905">584.0</td><td data-bbox="1480 873 1742 905">3 Dec 2021</td><td data-bbox="1742 873 2160 905">Not Applicable</td></tr> <tr> <td data-bbox="428 905 691 936">TAMBO SUR V</td><td data-bbox="691 905 954 936">1124-577-2021</td><td data-bbox="954 905 1217 936">Cateo</td><td data-bbox="1217 905 1480 936">7,500.0</td><td data-bbox="1480 905 1742 936">Not Granted</td><td data-bbox="1742 905 2160 936">Application</td></tr> <tr> <td data-bbox="428 936 691 968">TAMBO SUR VI</td><td data-bbox="691 936 954 968">1124-579-2021</td><td data-bbox="954 936 1217 968">Cateo</td><td data-bbox="1217 936 1480 968">5,457.0</td><td data-bbox="1480 936 1742 968">5 Nov 2024</td><td data-bbox="1742 936 2160 968">16-Feb-2028</td></tr> <tr> <td data-bbox="428 968 691 1000">TORO</td><td data-bbox="691 968 954 1000">1124-528-M-2011</td><td data-bbox="954 968 1217 1000">Discovery claim</td><td data-bbox="1217 968 1480 1000">1,685.0</td><td data-bbox="1480 968 1742 1000">2 Jul 2013</td><td data-bbox="1742 968 2160 1000">Not Applicable</td></tr> </tbody> </table>	Tenure Name	Tenement	Tenure Type	Area (Ha)	Grant Date	Expiry Date	LOLA	1124-181-M-2016	Discovery claim	2,367.0	29 Dec 2016	Not Applicable	MALAMBO	425-101-2001	Discovery claim	3,004.0	13 Aug 2019	Not Applicable	MALAMBO 2	1124-485-M-2019	Discovery claim	414.1	24 Jun 2021	Not Applicable	MALAMBO 3	1124-074-2022	Discovery claim	2,208.0	Not Granted	Not Applicable	MALAMBO 4	1124-073-2022	Discovery claim	2,105.0	27 Nov 2023	Not Applicable	TAMBO SUR	1124-188-R-2007	Discovery claim	4,451.0	11 Jul 2019	Not Applicable	TAMBO SUR I	1124-421-2020	Discovery claim	833.0	9 Nov 2021	Not Applicable	TAMBO SUR II	1124-420-2020	Discovery claim	833.0	13 Dec 2021	Not Applicable	TAMBO SUR III	1124-422-2020	Discovery claim	833.0	13 Jul 2022	Not Applicable	TAMBO SUR IV	1124-299-2021	Discovery claim	584.0	3 Dec 2021	Not Applicable	TAMBO SUR V	1124-577-2021	Cateo	7,500.0	Not Granted	Application	TAMBO SUR VI	1124-579-2021	Cateo	5,457.0	5 Nov 2024	16-Feb-2028	TORO	1124-528-M-2011	Discovery claim	1,685.0	2 Jul 2013	Not Applicable	Note 1: For a Discovery Claim, there is no expiration date. The mineral tenure is retained while the minimum investment plan is followed.	
Tenure Name	Tenement	Tenure Type	Area (Ha)	Grant Date	Expiry Date																																																																																	
LOLA	1124-181-M-2016	Discovery claim	2,367.0	29 Dec 2016	Not Applicable																																																																																	
MALAMBO	425-101-2001	Discovery claim	3,004.0	13 Aug 2019	Not Applicable																																																																																	
MALAMBO 2	1124-485-M-2019	Discovery claim	414.1	24 Jun 2021	Not Applicable																																																																																	
MALAMBO 3	1124-074-2022	Discovery claim	2,208.0	Not Granted	Not Applicable																																																																																	
MALAMBO 4	1124-073-2022	Discovery claim	2,105.0	27 Nov 2023	Not Applicable																																																																																	
TAMBO SUR	1124-188-R-2007	Discovery claim	4,451.0	11 Jul 2019	Not Applicable																																																																																	
TAMBO SUR I	1124-421-2020	Discovery claim	833.0	9 Nov 2021	Not Applicable																																																																																	
TAMBO SUR II	1124-420-2020	Discovery claim	833.0	13 Dec 2021	Not Applicable																																																																																	
TAMBO SUR III	1124-422-2020	Discovery claim	833.0	13 Jul 2022	Not Applicable																																																																																	
TAMBO SUR IV	1124-299-2021	Discovery claim	584.0	3 Dec 2021	Not Applicable																																																																																	
TAMBO SUR V	1124-577-2021	Cateo	7,500.0	Not Granted	Application																																																																																	
TAMBO SUR VI	1124-579-2021	Cateo	5,457.0	5 Nov 2024	16-Feb-2028																																																																																	
TORO	1124-528-M-2011	Discovery claim	1,685.0	2 Jul 2013	Not Applicable																																																																																	
Note 2: All mineral tenures are held by GWK S.A.																																																																																						
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> Historical exploration activities for the Toro (1124-528-M-11) tenure have been covered in the Belarrox Limited (ASX: BRX) ASX Release dated 23rd Mar 2023 and titled 'Binding Agreement executed to acquire TMT Project in Argentina Significant Zinc Mineralisation (266m @ 0.76% Zn) reported in historical drilling.' Note: the aforementioned ASX Release contains a 'Cautionary Statement', and the 'Exploration Results' are yet to be reported to the JORC (2012) Code. 																																																																																				
		<ul style="list-style-type: none"> The interpretation of the regional geological structures, based on a number of sources and datasets (e.g. porphyry potential [Ford, et al, (2015) & USGS (2008)], crustal lineaments [Chernicoff, et. al, (2002)], regional gravity, 																																																																																				



<p>Geology</p> <ul style="list-style-type: none">Deposit type, geological setting and style of mineralisation.	<p>regionalmagnetics, regional and local geology [SegemAR (2023) & Servicio Nacional de Geología y Minera (2023)] had been utilised to confirm if the interpretation of alteration and/or mineralisation from the processed ASTER and Sentinel-2 datasets.</p> <ul style="list-style-type: none">Fathom Geophysics (Core & Core, 2023) processed the ASTER and Sentinel-2 data for use in the Garwin (2023) study, and the processed data is included in images within this ASX Release.Fathom Geophysics processed the data reported Malambo Geophysics into MVI Amplitude, MVI Induced, MVI Remanent datasets. MVI Amplitude figures have been used in this announcement.Regional Geology: The TMT project is within or in proximity to a number of significant regional metallogenic belts of South America, (1) the Andean Metallogenic Belt, (2) the El Indio Metallogenic (Cu-Au) Belt, and (3) the Maricunga Metallogenic (Cu-Au) Belt.Toro (1124-528-M-11) tenure and Specific Geology (from historical reports): The identified rocks include the Valle del Cura Formation (Eocene), composed mainly of red conglomerates, sandstones, tuffs, andesites and pyroclastic ignimbrites. Some of these rocks outcrop on the surface, with tuffaceous breccias being intersected in historical drill holes. The sequence is intruded by subvolcanic bodies pseudo concordant to stratification, "Intrusivos Miocenos", the source of the hydrothermal alteration-mineralization in the area. Rhyodacitic - dacitic rocks, altered by advanced argillic and phyllitic alteration dominate the area. Silicification, argillic, and propylitic alteration are present in the Toro project tenure. Stockworks and at least one (1) Breccia Pipe have been identified during historical exploration activities at the Toro project.The Targets' interpreted from the Satellite Imagery: 12 prospective targets are reconsidered to represent surface expressions of high-sulphidation epithermal and/or porphyry-style mineral systems based on the interpretation of processed ASTER and Sentinel-2 datasets and comparison to regional GeologicalAnalogue deposits with comparable surface mineralisation (South to North):<ul style="list-style-type: none">Toro North;Toro Central;Toro South;Tambo VI;Lola;Malambo;Malambo 3;Malambo 4;Tambo South;Tambo V;Tambo North; &Tambo North 2.The interpretation of the regional geological structures, based on a number of sources and datasets (e.g. porphyry potential [Ford, et al, (2015) & USGS (2008)], crustal lineaments [Chernicoff, et. al, (2002)]), regional gravity,



	<p>regional magnetics, regional and local geology [SegemAR (2023) & Servicio Nacional de Geología y Minera (2023)] had been utilised to confirm the interpretation of alteration and/or mineralisation from the processed ASTER and Sentinel-2 datasets.</p> <ul style="list-style-type: none"> Geological interpretation is then based on the responses displayed in the imagery against known surface hydrothermal alteration and/or surface geology associated with key mineral deposits. Geological analogues are a useful tool for delineating similar surface expressions of mineralisation. Follow-up on the ground exploration activities will be required to confirm the remote sensing interpretation of the geology. 																																																																																																									
<p><i>Drill hole Information</i></p> <ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results, including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> Easting and northing of the drill hole collar Elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar Dip and azimuth of the hole Downhole length and interception depth Hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<ul style="list-style-type: none"> Summary information for drillholes <table border="1" data-bbox="1358 436 2100 786"> <thead> <tr> <th>HoleID</th><th>Easting</th><th>Northing</th><th>Elevation</th><th>Azi</th><th>Dip</th><th>End Depth</th></tr> </thead> <tbody> <tr> <td>TMT-TSU-DDH-001</td><td>428637</td><td>6791490</td><td>4183</td><td>91</td><td>80</td><td>1028.6</td></tr> <tr> <td>TMT-TSU-DDH-002</td><td>428756</td><td>6791344</td><td>4077</td><td>89</td><td>70.3</td><td>1305</td></tr> <tr> <td>TMT-MAL-DDH-001</td><td>431839</td><td>6781700</td><td>3839</td><td>86.7</td><td>88.1</td><td>1166.0</td></tr> <tr> <td>TMT-MAL-DDH-002</td><td>432356</td><td>6781741</td><td>3647</td><td>260</td><td>65.1</td><td>631.5</td></tr> <tr> <td>TMT-TC-DDH-001</td><td>433243</td><td>6769859</td><td>3497</td><td>270</td><td>60</td><td>705.6</td></tr> <tr> <td>TMT-TC-DDH-002</td><td>432894</td><td>6770343</td><td>3396</td><td>200</td><td>80</td><td>415.00</td></tr> <tr> <td>TMT-TC-DDH-003</td><td>432874</td><td>6770603</td><td>3398</td><td>225</td><td>60</td><td>283.70</td></tr> </tbody> </table> <ul style="list-style-type: none"> Copper intervals are determined using a 0.1% Cu cut-off and an internal waste of up to 10 meters. Gold and molybdenum values are averaged over the same intervals as determined by the Cu intersections. <table border="1" data-bbox="1381 913 2100 1278"> <thead> <tr> <th>Drillhole</th><th>From (m)</th><th>To (m)</th><th>Interval (m)</th><th>Cu (%)</th><th>Au (ppm)</th><th>Mo (ppm)</th></tr> </thead> <tbody> <tr> <td>TMT-TSU-DDH-001</td><td>102</td><td>132</td><td>30</td><td>0.13</td><td>0.04</td><td>69.1</td></tr> <tr> <td>TMT-TSU-DDH-001</td><td>168</td><td>184</td><td>16</td><td>0.11</td><td>0.04</td><td>14.6</td></tr> <tr> <td>TMT-TSU-DDH-001</td><td>898</td><td>1027</td><td>129</td><td>0.12</td><td>0.01</td><td>72.1</td></tr> <tr> <td>TMT-TSU-DDH-002</td><td>369</td><td>417</td><td>48</td><td>0.11</td><td>0.04</td><td>14.2</td></tr> <tr> <td>TMT-TSU-DDH-002</td><td>629</td><td>731</td><td>102</td><td>0.11</td><td>0.04</td><td>53.8</td></tr> <tr> <td>TMT-TSU-DDH-002</td><td>823</td><td>851</td><td>28</td><td>0.12</td><td>0.02</td><td>71.2</td></tr> </tbody> </table>	HoleID	Easting	Northing	Elevation	Azi	Dip	End Depth	TMT-TSU-DDH-001	428637	6791490	4183	91	80	1028.6	TMT-TSU-DDH-002	428756	6791344	4077	89	70.3	1305	TMT-MAL-DDH-001	431839	6781700	3839	86.7	88.1	1166.0	TMT-MAL-DDH-002	432356	6781741	3647	260	65.1	631.5	TMT-TC-DDH-001	433243	6769859	3497	270	60	705.6	TMT-TC-DDH-002	432894	6770343	3396	200	80	415.00	TMT-TC-DDH-003	432874	6770603	3398	225	60	283.70	Drillhole	From (m)	To (m)	Interval (m)	Cu (%)	Au (ppm)	Mo (ppm)	TMT-TSU-DDH-001	102	132	30	0.13	0.04	69.1	TMT-TSU-DDH-001	168	184	16	0.11	0.04	14.6	TMT-TSU-DDH-001	898	1027	129	0.12	0.01	72.1	TMT-TSU-DDH-002	369	417	48	0.11	0.04	14.2	TMT-TSU-DDH-002	629	731	102	0.11	0.04	53.8	TMT-TSU-DDH-002	823	851	28	0.12	0.02	71.2
HoleID	Easting	Northing	Elevation	Azi	Dip	End Depth																																																																																																				
TMT-TSU-DDH-001	428637	6791490	4183	91	80	1028.6																																																																																																				
TMT-TSU-DDH-002	428756	6791344	4077	89	70.3	1305																																																																																																				
TMT-MAL-DDH-001	431839	6781700	3839	86.7	88.1	1166.0																																																																																																				
TMT-MAL-DDH-002	432356	6781741	3647	260	65.1	631.5																																																																																																				
TMT-TC-DDH-001	433243	6769859	3497	270	60	705.6																																																																																																				
TMT-TC-DDH-002	432894	6770343	3396	200	80	415.00																																																																																																				
TMT-TC-DDH-003	432874	6770603	3398	225	60	283.70																																																																																																				
Drillhole	From (m)	To (m)	Interval (m)	Cu (%)	Au (ppm)	Mo (ppm)																																																																																																				
TMT-TSU-DDH-001	102	132	30	0.13	0.04	69.1																																																																																																				
TMT-TSU-DDH-001	168	184	16	0.11	0.04	14.6																																																																																																				
TMT-TSU-DDH-001	898	1027	129	0.12	0.01	72.1																																																																																																				
TMT-TSU-DDH-002	369	417	48	0.11	0.04	14.2																																																																																																				
TMT-TSU-DDH-002	629	731	102	0.11	0.04	53.8																																																																																																				
TMT-TSU-DDH-002	823	851	28	0.12	0.02	71.2																																																																																																				
<p><i>Data aggregation methods</i></p> <ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g., cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated, and some typical examples of such 	<ul style="list-style-type: none"> Significant intercepts for the TMT Project are calculated above a nominal cut-off grade of 0.1% Cu. Where gold and molybdenum values are reported, they were averaged over the same intervals as determined by the Cu intersections. Where appropriate, significant intersections may contain up to 10m down-hole distance of internal dilution (less than 0.1% Cu). Significant intersections are separated 																																																																																																									



	<p>aggregations should be shown in detail.</p> <ul style="list-style-type: none"> The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<p>where internal dilution is greater than 10m down-hole distance.</p> <ul style="list-style-type: none"> Length weighted averages are used for any non-uniform intersection sample lengths. Length weighted average is (sum product of interval x corresponding interval assay grade), divided by sum of interval lengths and rounded to one decimal place. No top cuts have been considered in reporting of grade results, nor was it deemed necessary for the reporting of significant intersections.
<i>Relationship between mineralisation widths and intercept lengths</i>	<ul style="list-style-type: none"> These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the downhole lengths are reported, there should be a clear statement to this effect (e.g., 'downhole length, true width not known'). 	<ul style="list-style-type: none"> True widths are not known for historical drilling All statistical information presented in ASX releases is inclusive of Field Duplicates and assayed samples that have been allocated ½ of the lower detection limit, for any elements reported as below the detection limit. The relationship between mineralisation widths and drillhole intersections are currently being assessed using geological interpretations from current DD drilling. The current DD program includes holes drilled across multiple orientations. Drill intersections are currently reported as downhole length.
<i>Diagrams</i>	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> Appropriate maps and sections are displayed in the body of the ASX Release.
<i>Balanced reporting</i>	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practised to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> NA
<i>Other substantive exploration data</i>	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported, including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> 'Interpretation of the regional geological structures, based on a number of sources and datasets (e.g. porphyry potential [Ford, et al, (2015) & USGS (2008)], crustal lineaments [Chernicoff, et. al, (2002)], regional gravity, regionalmagnetics, regional and local geology [SegemAR (2023) & Servicio Nacional de Geologia y Minera (2023)] had been utilised to confirm if the interpretation of alteration and/or mineralisation from the processed ASTER and Sentinel-2 datasets. Geological interpretation is then based on the responses displayed in the imagery against known surface hydrothermal alteration and/or surface geologyassociated with key mineral deposits. Geological analogues are a useful tool for delineating similar surface expressions of mineralisation. Follow-up on the ground exploration activities is required to confirm the remote sensing interpretation of the geology and in particular, confirm thedimensions of any surface expression of alteration and/or mineralisation. Field mapping has been completed on the Toro South and Toro North Targets;the field mapping is substantially complete for the Toro Central Target. The information on the drone survey conducted by DAMS is as follows: <ul style="list-style-type: none"> Sensor: <ul style="list-style-type: none"> Light Weight Potassium Magnetometer GEM GSMP-

**Further work**

- The nature and scale of planned further work (e.g., tests for lateral extensions or, depth extensions or large-scale step-out drilling).
- Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.

35U/25U

- GEMDAS Data Acquisition Module
- Cable for PixHawk integration
- Data Collection:
 - Line Spacing: 100m
 - Flight Line Azimuth: 90°
 - Tie Line Azimuth: 0°
 - Nominal Magnetic Sensor Altitude (AGL): 80m
 - Terrain Following: Utilised SRTM data for terrain following to minimise topographic effects.
 - Groundspeed: 3-6 m/s (dependent on terrain and environmental conditions)
- The information on the MT/IP survey conducted by Quantec is as follows:
 - Survey specifications:
 - Survey Type: TITAN DC/IP & MT Survey
 - Station Interval: 100 m
 - Dipole Size: 100 m
 - IP Array: Pole-Dipole-Dipole
 - MT Array: Tensor MT
 - Inversion history:
 - 2D IP Inversion
 - UBC 2D IP (DC referenced) Inversion
 - 3D IP Inversion
 - UBC 3D IP Inversion
 - LOKE 3D IP Inversion
 - 3D DC Inversion
 - UBC 3D DC Inversion
 - LOKE 3D DC Inversion
 - 3D MT Inversion
 - MT 3D Ztot from 100 Ohm-m Half-Space model
 - Plotting parameters
 - Gridding Algorithm: Minimum Curvature
 - Grid Cell Size: 10 metres
 - Contours: Linear 2, 10 levels
 - Colour Zoning: Linear or Log Linear (colour.tbl)
 - Coordinate System: UTM Coordinate
 - Datum / Projection: WGS84 / UTM zone 19 SH
- Regional mapping and sampling are ongoing at TMT. Exploration is focused on the spectral targets discussed in this JORC Table 1.
- Appropriate maps and sections are displayed in the body of the ASX Release