11 December 2023

ASX ANNOUNCEMENT

TMT Project – Field Work Update

KEY HIGHLIGHTS

- Geological mapping and sampling underway on identified priority targets.
- Consulting Geologist Dr. Steve Garwin undertook a field visit to the site during November.
- Porphyritic diorite outcrop showing potassic alteration and copper bearing porphyry style veining discovered at Toro North.
- Drone Magnetic Geophysical Survey planned over priority targets.
- Toro Project campsite is fully operational for 20 people.
- Two fully manned exploration teams now on site.



Belararox Ltd (ASX:BRX) (Belararox or the Company), a mineral exploration company focused on high-value clean energy metals, is pleased to provide an update on the ongoing field activities at the Company's TMT Project in Argentina.

Independent Technical Consultant, Dr. Steve Garwin visited the Project in early November to initiate the work program, train the geological team in the 'Anaconda' mapping technique and assess the project for the most suitable geochemical sampling program to utilise. Mapping has been conducted at Toro South, Toro Central and Toro North which has confirmed porphyry style mineralisation and alteration. At Toro North, a previously unreported unknown potassic altered diorite outcrop was discovered. The outcrop of biotite (potassic)-altered porphyritic hornblende diorite contains up to 3-4 vol. % quartz veinlets with centre lines filled by fine-grained magnetite and up to 0.5 vol. % chalcopyrite (<u>+</u> glassy limonite and chalcanthite) as veinlets and disseminated grains. Furthermore, a Drone Magnetic Geophysical Survey is currently being planned and is expected to commence shortly over the Project's Toro and Malambo priority targets.

Exploration Director - Argentina, Jason Ward, commented: "The mapping and sampling program is advancing well and the discovery of a previously unreported and potassic altered porphyritic diorite with B veins exhibiting chalcopyrite mineralisation validates our exploration method and the prospectivity of the project. The B-type quartz-magnetite veins contain chalcopyrite mineralisation associated with magnetite and we expect that our upcoming drone magnetic survey will help delineate this at depth. The assistance of Dr. Steve Garwin to kick off the mapping and sampling program has been invaluable."

Belararox's Managing Director, Arvind Misra, commented: "Under the leadership of country and exploration director Jason Ward and the expert guidance of Dr. Steve Garwin, Belararox is making pleasing progress in the exploration of our TMT Project in Argentina for large porphyry copper/gold deposits. The potential of the project is truly exciting. With the Toro campsite now fully operational, our dedicated exploration teams are continuing the thorough exploration programs to unlock the mineral potential of the project."

DR. STEVE GARWIN'S SITE VISIT

Dr. Steve Garwin travelled to the TMT Project in early November, to train the team in the Anaconda mapping technique and assess the most suitable geochemical sampling methods to be utilised at the Project. The work has resulted in the discovery of an outcrop of potassic altered porphyritic hornblende diorite at Toro North (pictured in **Figure 1**)



Figure 1: Previously unknown zone of potassic alteration ('bio-alt' in the background of the photograph) discovered at Toro North by the Belararox team, as assisted by Dr. Garwin (foreground).

The newly discovered potassic alteration zone within Toro North outcrops at the junction of broader NNW, WNW and NE trending linear zones of iron-oxide –kaolinite – phyllic alteration as can be seen in **Figure 2**: Apparent zonation of hydrothermal Alteration at TMT Project. (Garwin, 2023; Core & Core, 2023). The Cu-Zn ratio of rock-chip samples are indicated by the colour ranges shown in the legend; the white dots represent the collar locations of previously completed drill-holes. and **Figure 3**: Linear zones of iron-oxide – kaolinite – phyllic alteration and the mineral models derived from the processing of ASTER and Sentinel-2 satellite spectral data in the Toro project. (Garwin, 2023; Core & Core, 2023). Toro North, and to a lesser extent, Toro South lie at the intersection of linear zones of satellite-inferred hydrothermal alteration.

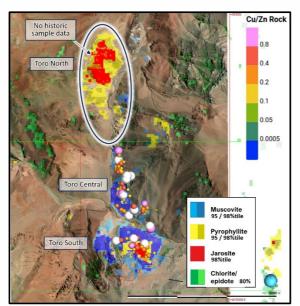


Figure 2: Apparent zonation of hydrothermal Alteration at TMT Project. (Garwin, 2023; Core & Core, 2023). The Cu-Zn ratio of rock-chip samples are indicated by the colour ranges shown in the legend; the white dots represent the collar locations of previously completed drill-holes.

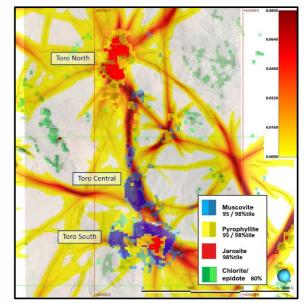


Figure 3: Linear zones of iron-oxide – kaolinite – phyllic alteration and the mineral models derived from the processing of ASTER and Sentinel-2 satellite spectral data in the Toro project. (Garwin, 2023; Core & Core, 2023)

GEOLOGICAL MAPPING AND SAMPLING

The team of in-country geologists (pictured in **Figure 4**) are currently mapping areas of interest defined by previous desktop studies. So far, some sectors across the Toro Project area have been found to exhibit copper oxides, veinlet systems, quartz veins with sugary textures and the minerals of magnetite, pyrite and chalcopyrite [refer to **Figure 5**].



Figure 4: Belararox Field Team standing in front of an outcrop of variably sericite-altered tonalite intrusive rock at Toro North.

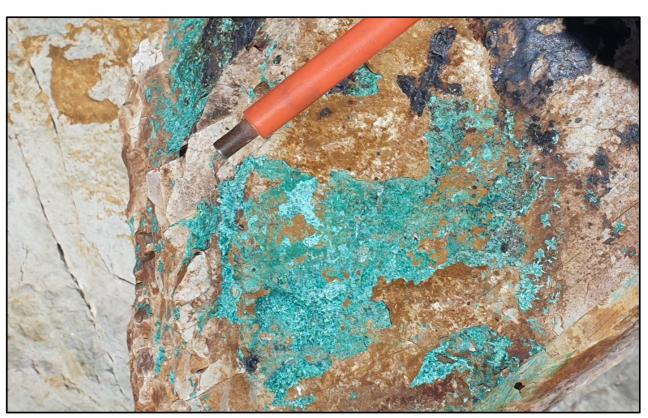


Figure 5: Atacamite [Cu₂Cl(OH)₃] and neotocite (Cu-bearing Mn-Fe-oxide) along a fracture surface in strongly sericite-altered dacite at Toro South. The atacamite and neotocite are exotic and of supergene origin, formed by the dissolution of pyrite and copper-sulphide minerals (such as chalcopyrite) by acidic groundwater, and then transported and deposited along fracture zones during the weathering of the dacitic host rock

Figure 6 and **Figure 7** show photographs of the newly discovered outcropping zone of biotite (potassic)altered porphyritic hornblende diorite at Toro North. The outcrop contains up to 3-4 vol. % quartz veinlets with center lines filled by fine-grained magnetite and up to 0.5 vol. % chalcopyrite (<u>+</u> glassy limonite and chalcanthite) as veinlets and disseminated grains. The mapping of this zone is ongoing.

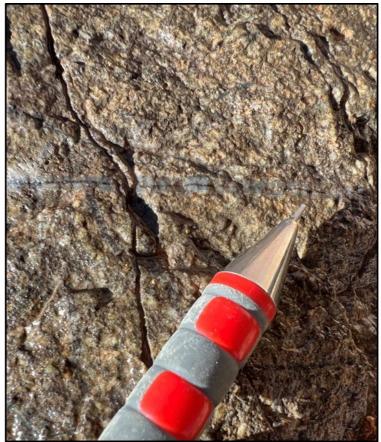


Figure 6: Closeup of outcropping biotite (potassic)-altered porphyritic hornblende diorite with quartz-magnetite veinlet.



Figure 7: Photograph of B-type quartz vein with minor magnetite in the same outcrop shown in the previous image. The orientation of this quartz vein is $N47^{\circ}W / 45^{\circ}SW$.

The progress of ongoing mapping efforts completed in Toro South is displayed in **Figure 8**. Mapping at Toro North is underway.


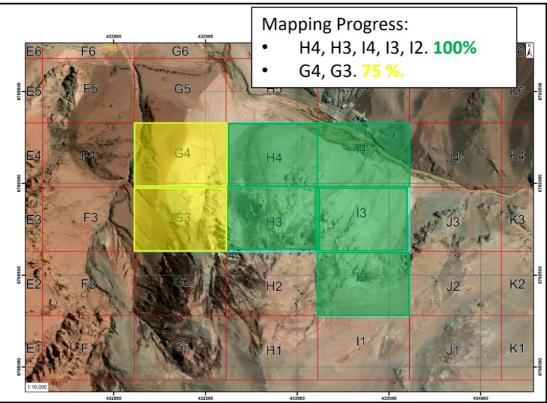


Figure 8: Extent of ongoing mapping efforts in Toro South.

The geology team is also well underway with a geochemical sampling program aimed at sampling outcrop, fine talus and colluvium, the progress of which is displayed in **Figure 9.** A total of 180 samples comprising rock chips and talus samples have been collected so far across the Toro North, Central and South Areas. Samples have been taken approximately every 50m to 100m along access roads and selected traverses. Samples will be assayed for multiple elements using a four-acid digest and it is planned to use the results to create a 3D geochemical model(s) to help guide further exploration.

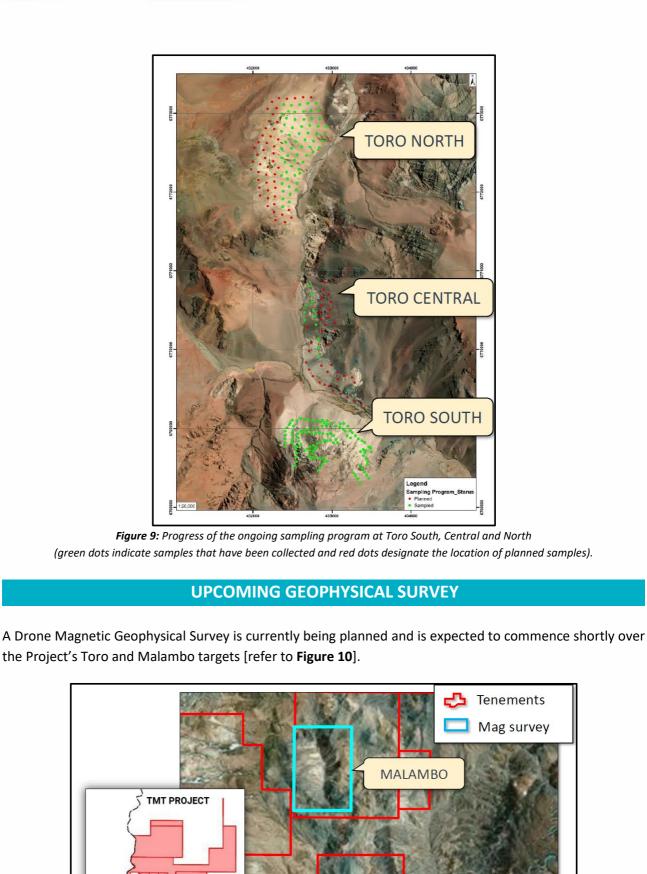

Malambo

Tenements

Mag survey

AMBO

Page 6 of 17

ASX | BRX

CAMPSITE FACILITIES

Significant progress has been made on the Project's campsite which is now fully operational and pictured in **Figure 11**. The campsite facilities include an office, dining room, toilets, showers, kitchen, and dormitories that together will serve as a primary base of operation for the project. A 15,000L fuel deposit has also been installed at the campsite to provide accessible fuel in support of exploration activities.



Figure 11: Refurbished and operational TMT Campsite

NEXT STEPS

Upcoming activities at the TMT Project include:

- Ongoing soil and rock chip sampling is continuing across all the northern priority target areas.
- Results of initial sampling programs at Toro Project expected in late January after the Xmas break.
- Expeditions from the Toro campsite to the northern targets will assess and ground-truth the track layout to the north, beyond the extent of the existing tracks.
- The Company will deploy a biologist to establish an environmental baseline to ensure compliance with flora and fauna regulations.
- The company will also take water samples for environmental baseline and compliance.
- Progress the water permit for drilling operations.
- Shortlisting of drilling contractors

This announcement has been authorised for release by the Board of Belararox.

SHAREHOLDER ENQUIRIES

Arvind Misra Managing Director Belararox Limited arvind.misra@belararox.com.au

MEDIA ENQUIRIES

Julia Maguire The Capital Network

julia@thecapitalnetwork.com.au

GENERAL ENQUIRIES

Belararox Limited

info@belararox.com.au

ABOUT BELARAROX LIMITED (ASX: BRX)

Belararox is a mineral explorer focused on securing and developing resources to meet the surge in demand from the technology, battery, and renewable energy markets. Our projects currently include the potential for zinc, copper, gold, silver, nickel, and lead resources.

PROJECTS

Situated within Argentina's San Juan Province, the Toro, Malambo, and Tambo (TMT) project occupies an unexplored area between the prolifically-mineralized El Indo and Maricunga Metallogenic Belts.

Belararox has already successfully identified numerous promising targets within the TMT project. These targets are set to undergo thorough exploration as part of an extensive program led by an experienced Belararox team that is currently present on-site in Argentina.

COMPETENT PERSON STATEMENT (TMT PROJECT, ARGENTINA)

The information in this announcement to which this statement is attached relates to Exploration Results and is based on information compiled by Jason Ward. Mr Ward is director of Condor Prospecting, a director of Belararox Limited, and is a Competent Person who is a Fellow and Chartered Professional of the Australasian Institute of Mining and Metallurgy. Mr Ward has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration, and to the exploration techniques being used to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr Ward has consented to the inclusion in this announcement of the matters based on his information in the form and context in which it appears. Mr Ward is one of the project vendors and currently director of Fomo Venture No 1 Pty Ltd.

FORWARD LOOKING STATEMENTS

This report contains forward looking statements concerning the projects owned by Belararox Limited. Statements concerning mining reserves and resources and exploration interpretations may also be deemed to be forward looking statements in that they involve estimates based on specific assumptions. Forward-looking statements are not statements of historical fact and actual events, and results may differ materially from those described in the forward-looking statements as a result of a variety of risks, uncertainties and other factors. Forward looking statements are based on management's beliefs, opinions and estimates as of the dates the forward - looking statements are made and no obligation is assumed to update forward looking statements.

REFERENCES

Barrick Gold Corporation. (2023, Mar 17). Barrick Annual Report 2022. Accessed from: https://www.barrick.com/English/investors/annual-report/default.aspx

Core, E., & Core, D. (2023, Apr). Processing of Sentinel-2 and ASTER data over the Toro project Area. Fathom Geophysics Unpublished Technical Report for Belararox Limited.

E& MJ Engineering and Mining Journal. (2021, Nov 18). Lundin Mining Makes Huge Investment in Josemaría Project. Website article: <u>https://www.e-mj.com/breaking-news/lundin-mining-makes-huge-investment-in-josemaria-project/</u>

Garwin, S. (2023.a, May 9). TMT Project – Area of Interest San Juan Province, Argentina: Interpretation of Satellite Spectral Imagery and Cu-Au-Ag-(Zn) Prospectivity. Unpublished Technical Presentation for Belararox Limited.

Garwin, S. (2023.b, Oct 12). TMT Project – Area of Interest: Interpretation of Satellite Spectral Imagery and Cu-Au-Ag-(Zn) Prospectivity: Characterization of Additional Target Areas: Including Tambo North and Tambo North 2; Tambo VI; Malambo 3 and 4; and Lola. Unpublished Technical Presentation Style Report submitted to Belararox Limited.

Garwin, S. (2023.c, November 8). TMT Project - Toro and Malambo Field Visit Notes, TMT Project, NW Argentina. Unpublished Technical Presentation for Belararox Limited.

ELAROX LINITE

Page 10 of 1	

 Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). Method of recording and assessing core and chip sample recovery and grade and whether a relationship exists between sample recovery and grade and whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	 Rock Chips : Standards were inserted every 20 samples - duplicates were inserted every 30 samples - blanks were inserted every 50 samples. Talus 	 If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether 	Sub-sampling techniques and
 Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core and chip sample recoveries and tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). Method of recording and assessing core and chip sample recoveries and enature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 			Logging
 Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	Not Applicable for the current ASX Release for the TMT project – 'Exploration Results' involving drilling, or their respective assays, logg and/or interpretation are included in this ASX Release for the TMT proje		Drill sample recovery
 Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 		 Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	Drilling techniques
 Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or 	 Grid sampling spacing was from 50 to 100 meters in the main igneous bodies. Talus samples: 500 - 700 grams of weight were taken for each talus sample, in the sectors of the grid when no rock outcrop was observed near the point assigned for sampling, being sieved with mesh number 10. Float samples: Up to 1.5 kg of rock samples were taken. Samples were limited to rock blocks in the colluvial zone, which present little transport and with good mineralization and alteration observed. 	 Inandmetic XKF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	
	 Outcrop samples: An average of one kilogram samples of Rock Chips was taken from various locations of well exposed alteration and mineralization zones by chipping and panel rock from the main Dacite and Diorite bodies. 	 Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or 	Sampling techniques

APPENDIX A: JORC (2012) CODE TABLE 1

The source documents for the "Appendix A: JORC (2012) Code Table 1" are listed in the "References" for the ASX Release.

 The data discussed in the current ASX Release deals with two (2) different multispectral spaceborne datasets: [i] Advanced Spaceborne Thermal Emission and Reflection Radiometer ("ASTER"); and 	 Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications 	Data spacing and distribution
 The data discussed in the current ASX Release deals with two (2) different multispectral spaceborne datasets: [i] Advanced Spaceborne Thermal Emission and Reflection Radiometer ("ASTER"); and [ii] Sentinel-2. The data is initially recorded by satellites and the processing and interpretation were delivered in the coordinate system of WGS84 Zone 195. The survey control is appropriate for interpretation of the processed ASTER and Sentinel-2 to deliver regional targets as surface expressions that are likely to represent surface expressions of high-sulphidation epithermal and/or porphyry-style mineral systems. Follow-up on the ground exploration activities will be required to confirm the remote sensing interpretation of the geology. 	 Accuracy and quality of surveys used to locate drill holes (collar and downhole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	Location of data points
 Not Applicable for the current ASX Release for the TMT project – no 'Exploration Results' involving surface samples, drilling, or their respective assays are included in this ASX Release for the TMT project. 	 The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	Verification of sampling and assaying
 Rock Chips / Talus / Float Samples were sent to ALS Mendoza - Argentina for 4 acid digest MEMS41L/MEMS61L exploration analysis. 	 The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	Quality of assay data and laboratory tests tests
samples are included in this, because this type of sample is only taken in the sectors where no rock outcrop is observed, within the previously defined sampling grid.	 sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	sample preparation

security Sample structure to geological data in relation Orientation of • If the relationship between the drilling orientation and the orientation of applied. Whether the orientation of sampling achieves unbiased sampling of Whether sample compositing has been applied The measures taken to ensure sample security this should be assessed and reported if material key mineralised structures is considered to have introduced a sampling bias deposit type. possible structures and the extent to which this is known, considering the Geological interpretation is then based on the responses displayed in the Follow-up on the ground exploration activities will be required to confirm The Sentinel-2 resolution ranges from 10m to 60m dependent on The ASTER processed datasets of a resolution of 15m for Visible Near Multispectral image sensors simultaneously capture image data within Not Applicable for the current ASX Release for the TMT project – no Follow-up on the ground exploration activities will be required to confirm of sources and datasets (e.g. porphyry potential [Ford, et al, (2015) & USGS The interpretation of the regional geological structures, based on a number Multispectral image sensors simultaneously capture image data within sulphidation epithermal and/or porphyry-style mineral systems. expressions that are likely to represent surface expressions of high-The survey control and data resolution is appropriate for interpretation of Infrared ("VNIR) or 30m for Short Wavelength Infrared ("SWIR"). the remote sensing interpretation of the geology. useful tool to delineate similar surface expressions of mineralisation. geology associated with key mineral deposits. Geological analogues are a imagery against known surface hydrothermal alteration and/or surface ASTER and Sentinel-2 datasets. interpretation of alteration and/or mineralisation from the processed Nacional de Geologia y Minera (2023)] had been utilised to confirm if the regional magnetics, regional and local geology [SegemAR (2023) & Servicio (2008)], crustal lineaments [Chernicoff, et. al, (2002)], regional gravity, wavelength centre position. Each band is commonly described by the band number and the band multiple wavelength ranges (bands) across the electromagnetic spectrum. multispectral spaceborne datasets The data discussed in the current ASX Release deals with two (2) different the remote sensing interpretation of the geology. the processed ASTER and Sentinel-2 to deliver regional targets as surface bandwidth wavelength centre position. Each band is commonly described by the band number and the band multiple wavelength ranges (bands) across the electromagnetic spectrum. interpretation were delivered in the coordinate system of WGS84 Zone 19S. The data is initially recorded by satellites and the processing and 'Exploration Results' involving surface samples, drilling, or their respective 0 0 0 [ii] Sentinel-2. [ii] Sentinel-2. Ξ Radiometer ("ASTER"); and Advanced Spaceborne Thermal Emission and Reflection

Sentinel-2 datasets.		
and Sentinel-2 datasets or the (ii) interpretation of the processed ASTER and		reviews
 No audits or reviews have occurred for either the (i) the processed ASTER 	 The results of any audits or reviews of sampling techniques and data. 	Audits or
assays are included in this ASX Release for the TMT project.		

SECTION 2 REPORTING OF EXPLORATION RESULTS

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary					
Mineral	 Type, reference name/number, location and ownership including 	 The mineral 	tenures are	located in the	e province	of San Juan	The mineral tenures are located in the province of San Juan, Argentina and
tenement and	agreements or material issues with third parties such as joint ventures,	details of th	e Terms Shee	et for the Acqu	uisition of	the Fomo Ve	details of the Terms Sheet for the Acquisition of the Fomo Ventures No1 Pty
land tenure	partnerships, overriding royalties, native title interests, historical sites,	Ltd Argentin	ean mineral t	enures are pre	esented in	Belararox Lir	Ltd Argentinean mineral tenures are presented in Belararox Limited (ASX: BRX)
status	wilderness or national park and environmental settings.	ASX Release	"Belararox s	ecures rights t	to acquire	Project in A	ASX Release "Belararox secures rights to acquire Project in Argentina" dated
	 The security of the tenure held at the time of reporting along with any 	03-Jan-2023		cdn-api.markit	digital.com	n/apiman-ga	https://cdn-api.markitdigital.com/apiman-gateway/ASX/asx-
	known impediments to obtaining a licence to operate in the area.	<u>research/1.0</u>	research/1.0/file/2924-02618068-	2618068-			
		6A1130657;	access toker	6A1130657?access_token=83ff96335c2d45a094df02a206a39ff4	2d45a094d	f02a206a39t	<u>ff4</u>
		 The details 	of the miner	als tenures th	hat make	up the TMT	The details of the minerals tenures that make up the TMT Project are as
		follows:					
		Tenure Name	Tenure	Tenure Type	Area (ha)	Grant Date	Current Tenure
			Identifier				Period End Date
		TORO	1124-528- M2011	Discovery claim	1,685	2/07/2013	Not Applicable
		LOLA	1124-181-M- 2016	Discovery claim	2,367	29/12/2016	Not Applicable
		MALAMBO	425-101-2001	Discovery claim	3,004	13/08/2019	Not Applicable
		MALAMBO 2	1124-485-M- 2019	Discovery claim	414.6	24/06/2021	Not Applicable
		LA SAL 2	414-134-D-	Cateo	4,359	13/05/2020	23/11/2023

RA

 \mathbf{O}

 Δ

<u>6A1130657</u>	6A1130657?access_token=83ff96335c2d45a094df02a206a39ff4	<u>1=83ff96335c2</u>	2d45a094d	f02a206a39t	<u>ff4</u>	
The details	of the miner	als tenures t	hat make	up the TMT	The details of the minerals tenures that make up the TMT Project are as	
follows:						
Tenure Name	Tenure Identifier	Tenure Type	Area (ha)	Grant Date	Current Tenure Period End Date	
TORO	1124-528- M2011	Discovery claim	1,685	2/07/2013	Not Applicable	
LOLA	1124-181-M- 2016	Discovery claim	2,367	29/12/2016	Not Applicable	
MALAMBO	425-101-2001	Discovery claim	3,004	13/08/2019	Not Applicable	
MALAMBO 2	1124-485-M- 2019	Discovery claim	414.6	24/06/2021	Not Applicable	
LA SAL 2	414-134-D- 2006	Cateo	4,359	13/05/2020	23/11/2023	
MALAMBO 3	1124-074-2022	Discovery claim	2,208	Application	Application	

TAMBO SUR VI 1124-579-2021

Cateo Cateo

5,457

Application Application

Application

Application

7,500 584 833 833 833

TAMBO SUR IV TAMBO SUR III

Discovery claim Discovery claim Discovery claim Discovery claim Discovery claim

TAMBO SUR II TAMBO SUR I

1124-422-2020 1124-420-2020 1124-421-2020 1124-188-R-2007

MALAMBO 4 TAMBO SUR

1124-073-2022

Discovery claim

2,105

4,451

Not Applicable

Application

13/12/2021

Not Applicable Not Applicable

9/11/2021 11/07/219 Application

Application

Application

3/12/2021

Not Applicable

TAMBO SUR V

1124-577-2021 1124-299-2021

Geology parties done by other Criteria Exploration • JORC Code explanation Acknowledgment and appraisal of exploration by other parties. Deposit type, geological setting and style of mineralisation. Note 3: A tenure overview map is displayed in Appendix A Note 2: All mineral tenures are held by GWK S.A. Note 1: For a Discovery Claim there is no expiry date. The mineral tenure is retained while the Historical exploration activities for the Toro (1124-528-M-11) tenure have minimum investment plan is followed. Commentary of processed ASTER and Sentinel-2 datasets and comparison to regional epithermal and/or porphyry-style mineral systems based on the interpretation are considered to represent surface expressions of high-sulphidation subvolcanic bodies pseudo concordant to stratification, "Intrusivos Miocenos", Toro (1124-528-M-11) tenure and Specific Geology (from historical reports): Maricunga Metallogenic (Cu-Au) Belt. Metallogenic Belt, (2) the El Indio Metallogenic (Cu-Au) Belt, and (3) the Regional Geology: The TMT project is within or in proximity to a number of data for use in the Garwin (2023) study, and the processed data is included in Fathom Geophysics (Core & Core, 2023) processed the ASTER and Sentinel-2 The interpretation of the regional geological structures, based on a number of The 'Targets' interpreted from the Satellite Imagery: 12 prospective targets been identified during historical exploration activities at the Toro project. the Toro project tenure. Stockworks and at least one (1) Breccia Pipe have dominate the area. Silicitcation, argillic, and propylitic alteration are present in Rhyodacitic - dacitic rocks, altered by advanced argillic and phyllic alteration the source of the hydrothermal alteration-mineralization in the area. breccias being intersected in historical drill holes. The sequence is intruded by ignimbrites. Some of these rocks outcrop on the surface, with tuffaceous mainly by red conglomerates, sandstones, tuffs, andesites and pyroclastic The identified rocks include the Valle del Cura Formation (Eocene), composed the significant regional metallogenic belts of South America, (1) the Andean images within this ASX Release. alteration and/or mineralisation from the processed ASTER and Sentinel-2 Geologia y Minera (2023)] had been utilised to confirm if the interpretation of magnetics, regional and local geology [SegemAR (2023) & Servicio Nacional de (2008)], crustal lineaments [Chernicoff, et. al, (2002)], regional gravity, regional sources and datasets (e.g. porphyry potential [Ford, et al, (2015) & USGS the JORC (2012) Code. historical drilling.". Note: the aforementioned ASX Release contains a Argentina Significant Zinc Mineralisation (266m @ 0.76% Zn) reported in 2023 and titled 'Binding Agreement executed to acquire TMT Project in been covered in the Belararox Limited (ASX:BRX) ASX Release dated 23rd Mar 'Cautionary Statement' and the 'Exploration Results' are yet to be reported to

Geological Analogue deposits with comparable surface mineralisation (South

Criteria JORC Code explanation Commentary Valadero - Geological Analogue (Holley, 2012) The Filo del Sol Cu-Au-Ag deposit has been used as a geological analogue since Filo del Sol deposit - Geological Analogue (Ausenco Engineering Canada Inc, Follow-up on the ground exploration activities will be required to confirm the Geological interpretation is then based on the responses displayed in the crosscut by a NW-SE structure [refer to Figure 12 on page 11]. quartz) and similar regional structural features, with N-S major lineament it shows a similar response to the siliceous alteration (silica and residual quartz-alunite alteration [refer to Figure 11]. deposit is associated with oxide & sulphide ores that are strongly associated The Filo del Sol deposit has an estimated Total Mineral Resource of 644Mt @ geology associated with key mineral deposits. Geological analogues are a alteration and/or mineralisation from the processed ASTER and Sentinel-2 with siliceous alteration (mapped silica and residual quartz), surrounded by the cut-off grade (Ausenco Engineering Canada Inc, 2023). The Filo del Sol varying for elements, oxide, sulphide, and AuEq, refer to source document for an average grade of 0.31% Cu, 0.32g/t Au, & 10.1 g/t Ag with cut-off grade 2023) (Filo Mining Corp., 2020): remote sensing interpretation of the geology. useful tool to delineate similar surface expressions of mineralisation. imagery against known surface hydrothermal alteration and/or surface datasets. Geologia y Minera (2023)] had been utilised to confirm if the interpretation of magnetics, regional and local geology [SegemAR (2023) & Servicio Nacional de (2008)], crustal lineaments [Chernicoff, et. al, (2002)], regional gravity, regional sources and datasets (e.g. porphyry potential [Ford, et al, (2015) & USGS The interpretation of the regional geological structures, based on a number of to North): 0 Lola; Toro North; Tambo North 2. Malambo 4; Malambo 3; Malambo; Toro Central; Tambo North; & Tambo V; Tambo South; Tambo VI; Toro South;

The Veladero deposit displayed clear links between the ASTER thermal image

Criteria	JORC Code explanation	Commentary
		 and the surface-mapped silica / residual quartz alteration with the final pit predominantly targeting the surface ASTER interpreted Jarosite & Pyrophyllite [refer to Figure 13 on page 11]. The Veladero surface alteration and mineralisation mapping presented against the final pit design by Holley (2012) includes silicification, quartz-kaolinite-sulphur, quartz-alunite, quartz-illite, chlorite-epidote, & chlorite-epidote.
Drill hole Information	 A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly 	 Not Applicable for the current ASX Release for the TMT project – no 'Exploration Results' involving surface samples, drilling, or their respective assays are included in this ASX Release for the TMT project.
Data aggregation methods	 In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	 Not Applicable for the current ASX Release for the TMT project – no 'Exploration Results' involving surface samples, drilling, or their respective assays are included in this ASX Release for the TMT project.
Relationship between mineralisation widths and intercept lengths	 These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	 Interpretation of the regional geological structures, based on a number of sources and datasets (e.g. porphyry potential [Ford, et al, (2015) & USGS (2008)], crustal lineaments [Chernicoff, et. al, (2002)], regional gravity, regional magnetics, regional and local geology [SegemAR (2023) & Servicio Nacional de Geologia y Minera (2023)] had been utilised to confirm if the interpretation of alteration and/or mineralisation from the processed ASTER and Sentinel-2 datasets. Geological interpretation is then based on the responses displayed in the imagery against known surface hydrothermal alteration and/or surface geology associated with key mineral deposits. Geological analogues are a useful tool to delineate similar surface expressions of mineralisation. Follow-up on the ground exploration activities is required to confirm the

BELARAROX LIMITED

Criteria	JORC Code explanation	Commentary
		remote sensing interpretation of the geology and in particular confirm the dimensions of any surface expression of alteration and/or mineralisation.
Diagrams	 Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	 Appropriate maps and sections are displayed in the body of the ASX Release.
Balanced	Where comprehensive reporting of all Exploration Results is not	• Follow-up on the ground exploration activities is required to confirm the
reporting	practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	remote sensing interpretation of the geology and in particular confirm the dimensions of any surface expression of alteration and/or mineralisation.
Other	 Other exploration data, if meaningful and material, should be reported 	• 'Other substantive exploration data' is summarised in the Belararox Limited
substantive	including (but not limited to): geological observations; geophysical	(ASX:BRX) ASX Release dated 23 rd Mar 2023 and titled 'Binding Agreement
exploration	survey results; geochemical survey results; bulk samples – size and	executed to acquire TMT Project in Argentina Significant Zinc Mineralisation
data	method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential	(266m @ 0.76% Zn) reported in historical drilling.". Note: the aforementioned ASX Release contains a 'Cautionary Statement' and the 'Exploration Results'
Firstbox mork	deleterious or contaminating substances.	are yet to be reported to the JORC (2012) Code.
	extensions or depth extensions or large-scale step-out drilling).	ASX Release.
	 Diagrams clearly highlighting the areas of possible extensions, including 	
	the main geological interpretations and future drilling areas, provided	
	this information is not commercially sensitive.	